
Panel Illustration:

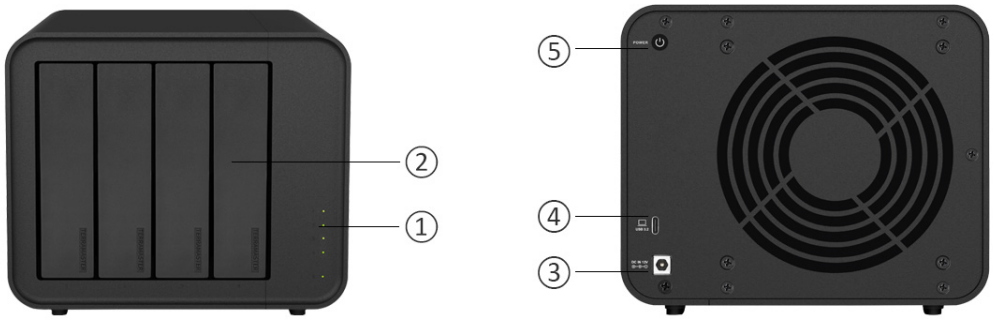

SN	Item	Description
①	Hard drive tray	3.5" SATA HDD; 2.5" SATA HDD; 2.5" SATA SSD
②	Hard Drive Indicators	Off: Hard drive not detected or hard drive in sleep mode Green: Hard drive is ready Flashing Green: Reading/writing Flashing Red: Hard drive fault or array damage Note: During the process of data recovery on RAID 1 mode, one hard drive indicator flashes green while the other flashes yellow.

Rear Cover Illustration:

SN	Item	Description
③	Power Jack	DC 12V power input Warning: Only use the power adapter originally supplied with your device. Use of any other adapter may result in damage.
④	USB Type-C Interface	Data transmission interface
⑤	Power Button	Short press once to power on, and press for 3 seconds to power off.

Specifications:

Storage	
Disk Slot Number	4
Compatible Disk Types	3.5" SATA HDD
	2.5" SATA HDD
	2.5" SATA SSD
File System	NTFS, APFS, Mac OS,FAT32,EXT4,exFAT
Maximum Internal Raw Capacity	88 TB (22 TB drive x 4)
RAIDs Supported	SINGLE DISK
Hardware RAID	/
RAID Manager Software	/
RAID Manager Software Language	/
RAID Online Expansion	/
RAID Migration	/
RAID Auto-rebuilding	/
Drive Hot Swap	√
HDD Sleep	√
HDD S.M.A.R.T. Inspection	/
Sector Inspection and Parity Check	/
SSC Cache	/
Daisy Chain	/
HDD NCQ Technology	/
Alert Notice	/
Event Log	/
External Ports	
USB	USB3.2 Type-C gen2 10Gbps
Thunderbolt	/
DP Interface	/
Network Interface	/
USB HOST Interface	/
Power Socket	DC IN 12V
Reading/writing Speed (max.)	
Reading Speed (max.)	Read：560MB/s (SSD* 1); Read：1016MB/s (SSD* 4)
Writing Speed (max.)	Write：520MB/s (SSD*1); Write：960MB/s (SSD*4)
Appearance	
Size (H*W*D)	222 x 179 x 154 mm
Packaging Size (H*W*D)	300 x 275 x 186 mm

Weight	net weight: 1.9Kg Gross Weight:3.1 Kg
System fan	120 x 120 x 25mm 1PCS
Fan mode	Smart
Noise Level	21.0dB(A)
Power Supply	
Power Supply	72 W
AC Input Voltage	100V to 240V AC
Current Frequency	50/60 HZ, Single Phase
Power Consumption	40.8 W(Access), 9.8 W (Hibernation)
Environment Temperature	
Working Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C (-5°F ~ 140°F)
Relative Humidity	5% ~ 95% RH
Supported OS	Windows OS、Mac OS
Warranty	2 years
Certificate	CE, FCC, CCC, KC
Environment	RoHS compliance
Package Contents:	Host unit (x1)
	Power cord (x1)
	USB Cable C to Type-C(10Gb) (x1)
	Quick Installation Guide (x1)
	Power adapter (x1)
	Screws (several)
	Limited Warranty Note x 1

Copyright@ TerraMaster 2023, All Rights Reserved. TerraMaster, the TerraMaster logo are trademarks or registered trademarks of TerraMaster Technology Co., Ltd. Other product and company names mentioned herein may be trademarks of their respective companies. TerraMaster may make changes to specification and product descriptions at anytime without notice.